

EUROGUARD® GATES

Jacksons Fencing



Jacksons' EuroGuard® gates are designed to match our range of EuroGuard® fencing. Available in Flatform Heavy, Extra, and Combi, they create secure access points with your choice of aesthetic, on their own or used in conjunction with the matching fencing to create a uniform perimeter. Gates can be supplied with manual or automatic operation in swing or sliding styles. All steel and timber gates are supplied with a 25 year guarantee against rust, rot, insect attack, and manufacturing defects.

EuroGuard Extra and Flatform Heavy Gate Specification:

- Flatform Heavy: Heights available from 1030-3000mm
- Extra: Heights available 2000 and 2400mm
- Widths available up to 12m wide for swing or sliding
- 60 x 40mm horizontal rails
- Gate posts are square hollow section in three sizes depending on height and width: 100mm, 120mm, 150mm
- Rectangular hollow section hanging and shutting stiles 60 x 60mm, wall thickness 2mm
- Two or three horizontal rails according to height and width. Gate leaves over 3.5m have specially designed bracing across the bottom of the gate for strength.
- Hinges allow gate to swing through an angle of 180 degrees
- One hold open latch and stop clamp for single gates, two hold open latches, centre gate stop, and drop bolt clamp for double gates
- Comes as standard with a slide latch. Key locks and emergency push pads available.
- Single and double leaf available


OPTIONS

- Posts can be dug in or baseplated
- Added security spikes and toppings
- Key lock, emergency exit push pad

FINISHES

- Galvan® zinc alloy coated to BS EN 10244-2:2009 class A as standard
- Powder coated to BS EN 13438 in one of our standard colours at extra cost
- Other colours available on request
- Jakcure® treated timber slats

- Marine coat for installations within 500m of salt water or estuary

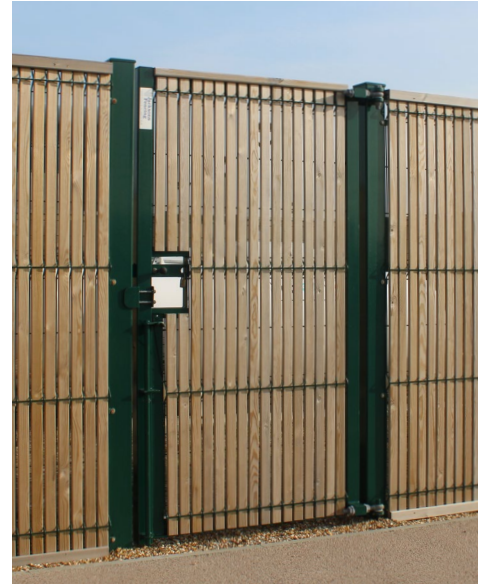

EuroGuard Combi Gate Specification:

- Heights available from 1500-3000mm
- Widths available up to 3m wide for single leaf swing gate and 6m for double leaf swing gate
- 60 x 40mm horizontal rails
- Gate posts are square hollow section in three sizes depending on height and width: 100mm, 120mm, 150mm
- Rectangular hollow section hanging and shutting stiles 60 x 60mm, wall thickness 2mm
- Hinges allow gate to swing through an angle of 180 degrees
- One hold open latch and stop clamp for single gates, two hold open latches, centre gate stop, and drop bolt clamp for double gates
- Comes as standard with a slide latch. Key locks and emergency push pads available.
- Single and double leaf available

AUTOMATION

- Ask our team about automating your gate. All of our gate automation engineers are DHF qualified to a minimum of level 2.

APPROVALS

- LPS 1175 certified gates available, enquire with our team.