

# ORNAMENTAL SLIDING GATES



- Pale spacing conforms to Building Regulations for anti-trap
- Horizontal rails for all gates are 60x40mm. Hanging and shutting stiles are rectangular hollow section 60x60mm
- Single or double leaf options available
- Cantilever or tracked options available
- Manual or automated operation
- Gateposts are square hollow section, 150 x 150mm
- Effective operation in applications subject to high wind loading
- Styles available: Standard, Style A + Style B


## FINISHES


- Hot dip galvanised to BS EN ISO 1461 as standard
- Hot dip galvanised and powder coated to BS EN 13438
- Marine coat for installations within 500m of salt water or an estuary

## PORTALS

- Base plated to bolt down onto concrete

## FINIAL OPTIONS



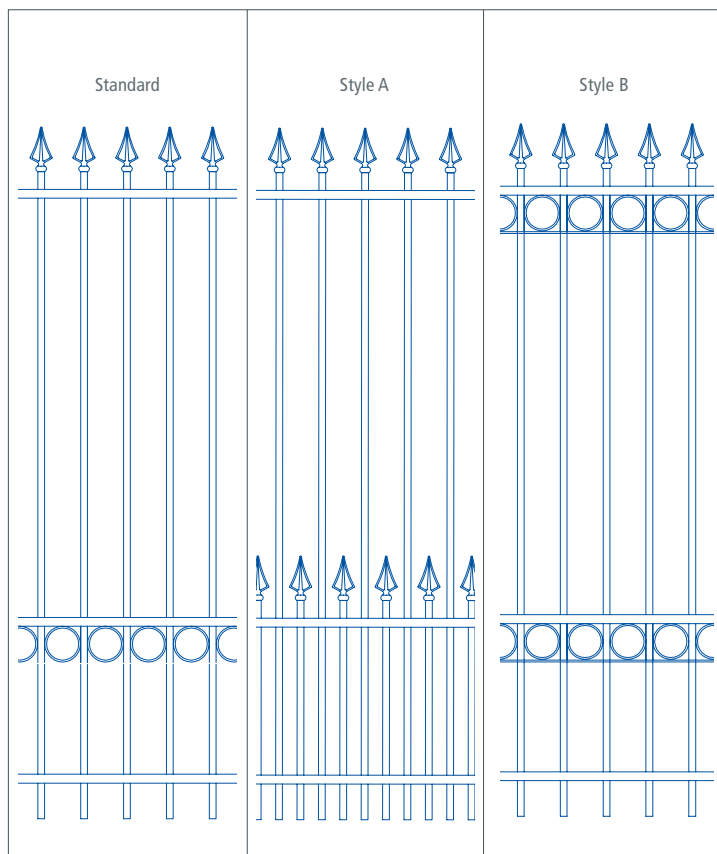

- Materials: Portals: 80 x 80 Sq, Stiles: 60 x 60 Sq, cantilever running tube:  $\varnothing 178$ , Tracked running tube: 200 x 100
- Automated:
  - Class 1 hold to open / close
  - Full Class 3 operation to suit current CE safety regulations including flashing light, photocells & safety edges. Motors to suit various gate sizes and open/close cycles.

## CONTACT

T: 0800 41 43 43

E: [security@jacksons-fencing.co.uk](mailto:security@jacksons-fencing.co.uk)

W: [www.jacksons-fencing.co.uk](http://www.jacksons-fencing.co.uk)