

EUROGUARD® SWING GATES



Green Single Leaf Swing Gate – Manual



Hinge Detail



Galvanised Double Leaf Swing Gate – Manual

Jacksons' EuroGuard® gates are designed to match our range of EuroGuard® fencing. Available in Flatform Heavy, Extra, and Combi, they create secure access points with your choice of aesthetic, on their own or used in conjunction with the matching fencing to create a uniform perimeter. All steel and timber gates are supplied with a 25 year guarantee against rust, rot, insect attack, and manufacturing defects.

EuroGuard Euroguard Flatform Heavy and Extra Gate Specification:

- Available in a range of standard widths up to 10m
- Flatform Heavy: Heights available from 1030-3000mm
- Extra: Heights available 2000 and 2400mm
- Horizontal rails for all gates are 60 x 40mm
- Single and double leaf available
- Manual or automated operation
- Complete with tamper-proof hinges that allow the gate to swing through an angle of 180 degrees (manual only)
- Square hollow section gate posts made in three sizes; 100mm, 120mm and 150mm depending on the gate height and width
- Two or three horizontal rails according to height and width. Gate leaves over 3.5m have specially designed bracing across the bottom of the gate for strength.

POST OPTIONS


- Over length set in concrete as standard
- Base plated to bolt down onto concrete

FINISHES

- Hot dip galvanised to BS EN ISO 1461 as standard
- Hot dip galvanised and powder coated to BS EN 13438
- Marine coat for installations within 500m of salt water or an estuary

STANDARD COLOURS

- Green RAL 6005, Black RAL 9005, Blue RAL 5010, Red RAL 3020, Yellow RAL 1018, White RAL 9010, Grey RAL 7012, Brown RAL 8017, Blue BS20-C-40
- Architectural grade powder coating
- Other colours on request

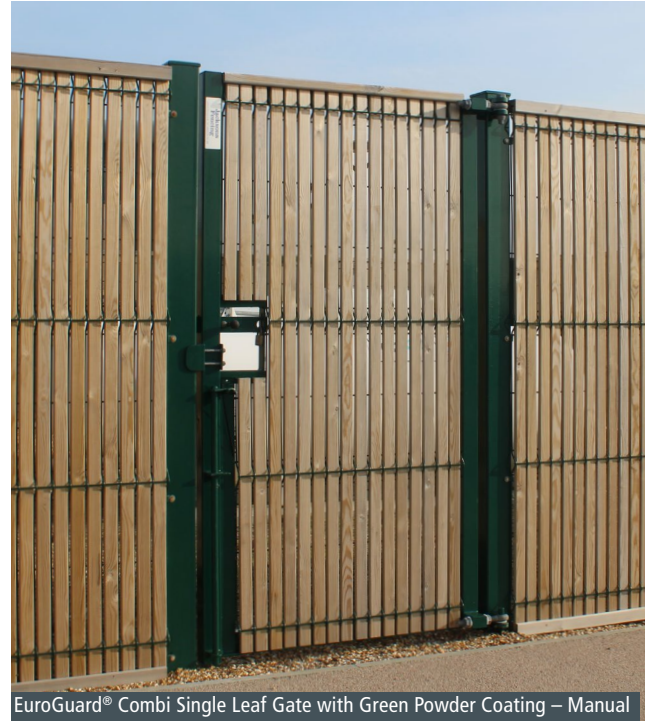

EuroGuard® Combi Gate Specification:

- Heights available from 1500-3000mm
- Widths available up to 3m wide for single leaf swing gate and 6m for double leaf swing gate
- Horizontal rails for all gates are 60 x 40mm
- Single and double leaf available
- Manual or automated operation
- Square hollow section gate posts made in three sizes; 100mm, 120mm and 150mm depending on the gate height and width
- Complete with tamper-proof hinges that allow the gate to swing through an angle of 180 degrees (manual only)
- Added security spikes and toppings

Locking Options

- Slide latch (as standard)
- Key lock
- Mechanical coded lock
- Push pad latch
- Electric strike lock
- Magnetic latch

OPTIONS

- Manual
- Automated

AUTOMATION

- Ask our team about automating your gate. All of our gate automation engineers are DHF qualified to a minimum of level 2.

APPROVALS

- LPS 1175 certified gates available enquire with our team.